

# Implementing Bignums in $\mu$ Smalltalk


comp105-staff@cs.tufts.edu

Spring 2015

## 1 Approach

Part II of the Smalltalk assignment is to implement arbitrary-precision arithmetic (Bignums). In completing Part II, particularly in writing your `Natural` class, you are faced with a great number of methods to implement. To help you organize this task, I suggest which methods to implement in what order, and I sketch how implementations of some methods may depend on other methods.

This diagram shows what the class hierarchy will look like once you finish implementing bignums. The unboxed classes are from the initial basis of  $\mu$ Smalltalk or from the Exercises in the textbook. The boxed classes are new classes you will write for this assignment. Each class that is followed by a number is from the Exercise with that number.

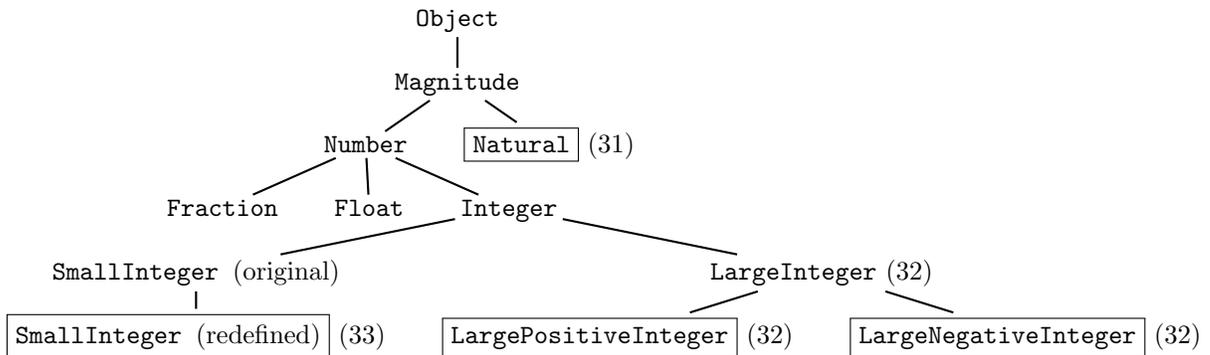

## 2 Class Natural

We suggest you divide class `Natural` into three stages. You may wish to do some testing after each stage.

## Stage I — Basics

1. Methods `digit:`, `digit:put:`, and `makeEmpty:` manipulate the array of digits in the representation. These are a good place to begin.  
Remember that `digit:` should work with any nonnegative argument, no matter how large. It is a good foundation to build on.
2. Method `doDigits:` has to do with *indexes*, not with digits themselves. This way it can be used for mutation—a worthy test.
3. Once you have access to the digits, you can define `trim`, which removes unneeded leading zeroes.
4. Once `trim` is written, you can write `digits:`, to initialize a newly allocated bignum.
5. Now you can define the *class* method `new:`, which is your first public method—it creates a new bignum.

## Stage II — Simple functions

6. Method `decimal` can be very simple if you use base  $b = 10$ . If you use a larger base, there will be some complexity here.
7. Once you have `decimal`, `print` is easy. Now you can debug!
8. Method `isZero` should be straightforward at this point.
9. With access to the digits, you can write `=`. You will find iteration over digits (`doDigits:`) to be helpful, and you will need to be careful when comparing bignums of different degree. (There is a very simple, elegant solution to the degree problem; try to find it!)

## Stage III — Arithmetic

10. The heart of your arithmetic implementation will be the two methods `set:plus:` and `set:minus:`. They depend on the digit methods above. A loop driven by `doDigits:` may be helpful.
11. You can now implement addition with method `+`. In addition to `set:plus:`, you may find it useful to use `trim` and `makeEmpty:`.

12. Subtraction is more complicated because it can fail: the difference of two natural numbers is not always a natural number. But building `subtract:withDifference:ifNegative:` on top of `set:minus:` is otherwise analogous to your construction of `+`.
13. With natural-number subtraction in hand, you can now implement the standard methods `-` and `<`. You should be able to get everything you need from `subtract:withDifference:ifNegative:`, without having to use lower-level methods of class `Natural`.
14. Multiplication is the most complicated of all. You will want to allocate a new number with `makeEmpty:` and initialize it to zero. Then, as suggested in the book, you'll need a double sum to add in all the partial products. A doubly nested `doDigits:` loop will help. To manipulate the partial products, `digit:` and `digit:put:` will be essential. Finally, use `trim` to control the growth of your bignums.

### 3 LargePositiveInteger and LargeNegativeInteger

Once you've gotten this far, `LargePositiveInteger` and `LargeNegativeInteger` will be relatively straightforward. The list of methods and hints given in the book should get you through. You will lean heavily on your `Natural` methods, but only the *public* methods. These are the methods of class `Magnitude`, together with the methods listed in the box on page 529.

You will also want to reuse the `LargeInteger` methods as much as you can. The really interesting part of this problem is the technique of *double dispatch*. This technique will require that you add such methods as `addLargePositiveIntegerTo:`. You'll then use these to rewrite the basic arithmetic methods on integers.